





AVA MASTER SERIES

Replacement of AVA female coupling

1

1. Push in the two "ears" that hold the clip in place. Feel free to use a pair of pliers or similar.
2. Push the pin at the same time from the opposite side.
3. Pull out the locking clip.

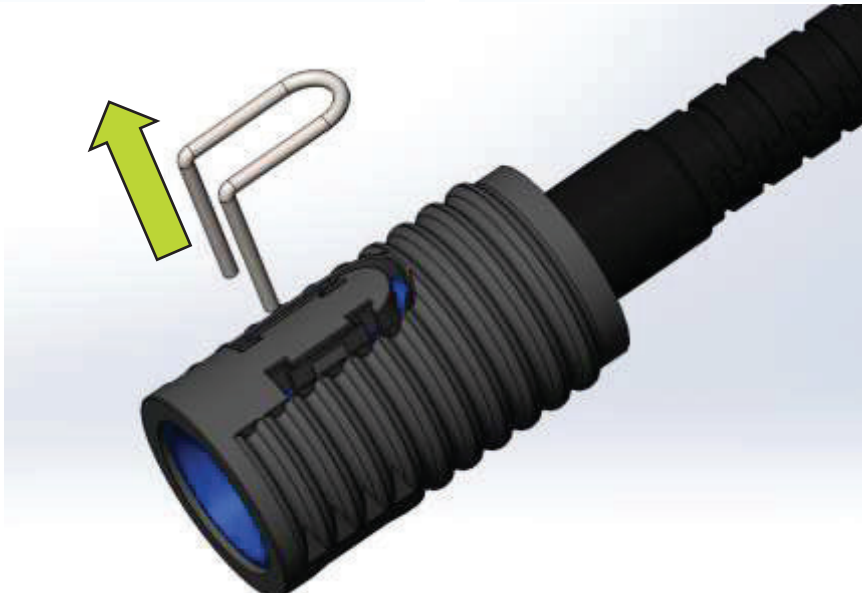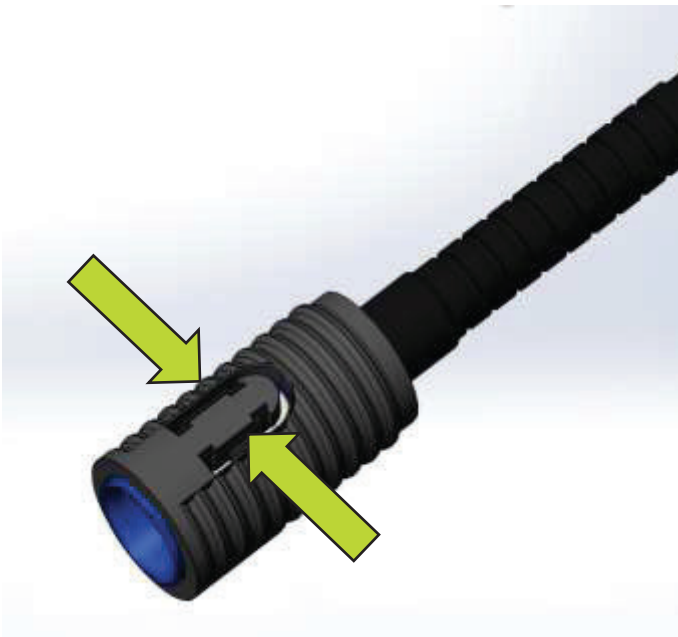

2

4. Pull back the outer plastic cap.
5. use a small flat-blade screwdriver to pop out the u-clip.
Pull the clip out of the slot it is in.
6. The hose is now loose from the coupling.

